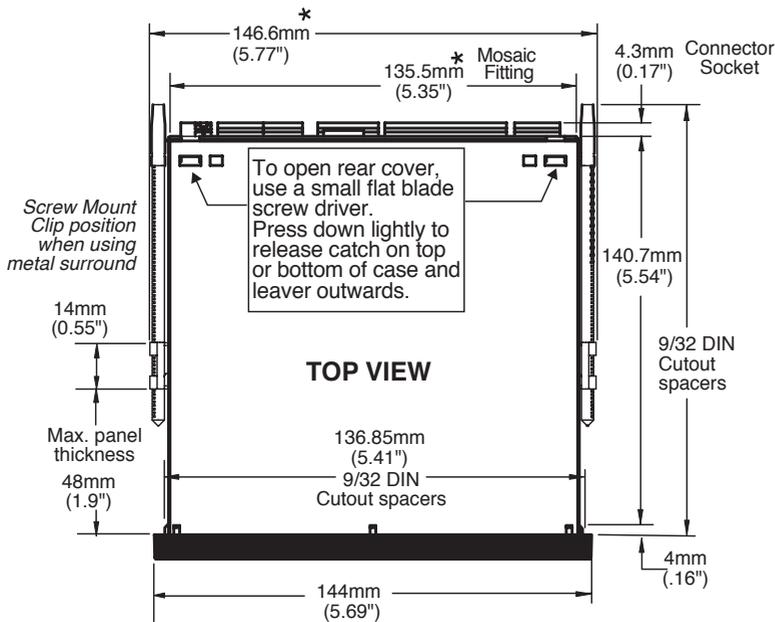**TEXMATE** *Smart Process Measurement* **Control**

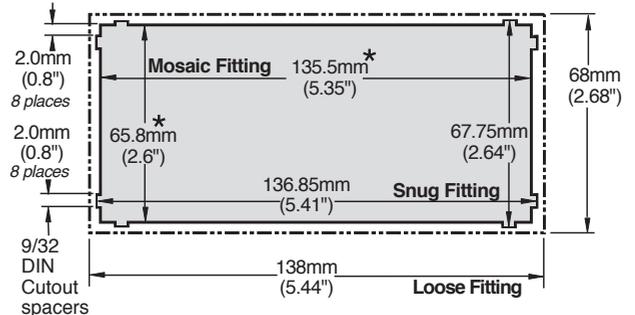## 9/32 DIN 144x72mm (5.69"x2.84") Case Dimensions and Panel Cutout

TOP VIEW

146.6mm (5.77")
135.5mm (5.35") Mosaic Fitting
4.3mm (0.17") Connector Socket

Screw Mount Clip position when using metal surround

To open rear cover, use a small flat blade screw driver. Press down lightly to release catch on top or bottom of case and leaver outwards.

14mm (0.55")

140.7mm (5.54")

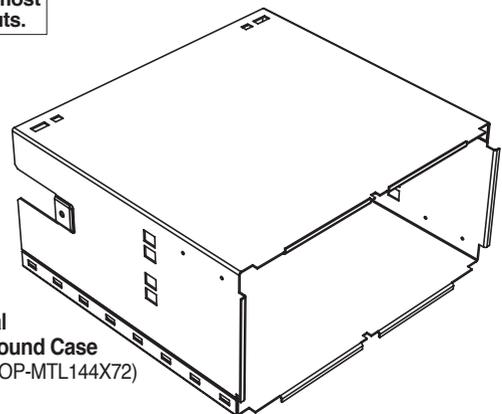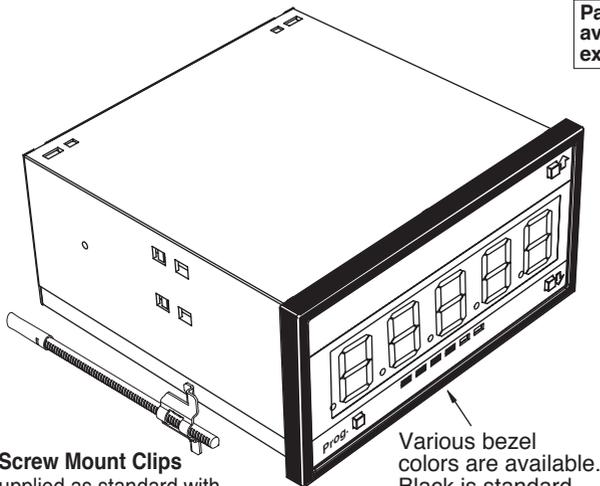9/32 DIN Cutout spacers

Max. panel thickness
48mm (1.9")

136.85mm (5.41")
9/32 DIN Cutout spacers

4mm (.16")

144mm (5.69")

PANEL CUTOUT
Case will mount in standard DIN cutouts

2.0mm (0.8") 8 places
Mosaic Fitting
135.5mm (5.35") *
68mm (2.68")

2.0mm (0.8") 8 places
65.8mm (2.6") *
67.75mm (2.64")

136.85mm (5.41")
Snug Fitting

9/32 DIN Cutout spacers

138mm (5.44")
Loose Fitting

*These dimensions are increased by 2mm (0.08") when the metal surround case is installed.

9/32 DIN 144x72mm

32766

72mm (2.84")

5mm (0.2") typical

144mm (5.69")

FRONT VIEW

SIDE VIEW

66.9mm (2.63") 9/32 DIN Cutout spacers

65.8mm (2.6") * Mosaic Fitting

8mm (0.31")

130.47mm (5.15")

14mm (0.55")

Top & Bottom Right-angled Connectors
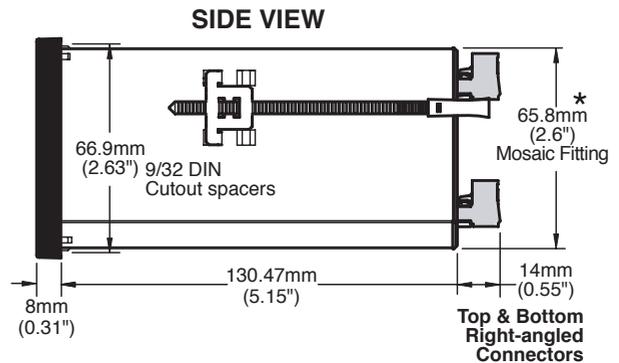
Panel adaptor plates are available to retrofit most existing panel cutouts.

Two Screw Mount Clips are supplied as standard with this case. For replacement *Screw Mount Clips,* Order P/N.(OP-MTLCLIP)

Various bezel colors are available. Black is standard.

Metal Surround Case
P/N:(OP-MTL144X72)

NOTE: The Metal Surround Case is pre-installed at the factory and cannot be removed without damage to the case.