

BN-45I

**24VDC Panel Meter
4 1/2 Digit 0.56" LED
in a 1/16 DIN Case**



Isolated 24VDC Powered LED Voltmeter in DIN 96x24mm Case.

General Features

The BN-45I is a 4 1/2 digit voltmeter in a compact 96x24mm case with isolated 24VDC power. Another version of the BN-45I, model BN-45, is also available with a non-isolated 5VDC power. The case has a short depth of just 2.83 inches (72mm) behind the panel.


The meter has three user-selectable ranges of 2V, 20V and 200V. The BN-45I may also be calibrated at the factory for these ranges or specially scaled for other ranges (see Ordering Information below). Provision to offset the zero is also available as an option for 4-20mA signals.

The display is shipped standard with red LEDs, but green LEDs or super bright LEDs for high ambient light environments are also offered. Display Segments Test, Display Blank and Hold Reading are standard features.

Typical Application Connections

DC Volts Single-ended


Measurement with a Resolution of 2V.

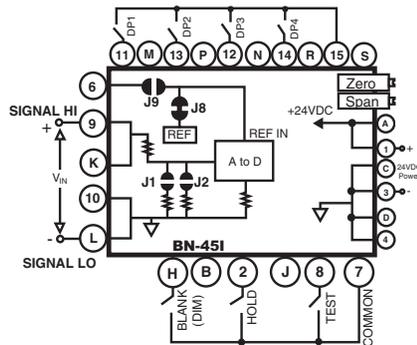

Ratiometric Voltmeter with External Reference

To use the BN-45I as a ratiometric voltmeter with an external reference, open J8 and close J9 jumpers. Connect as shown in the diagram.

NOTE: Signal Low is common to the 24VDC Power Ground.

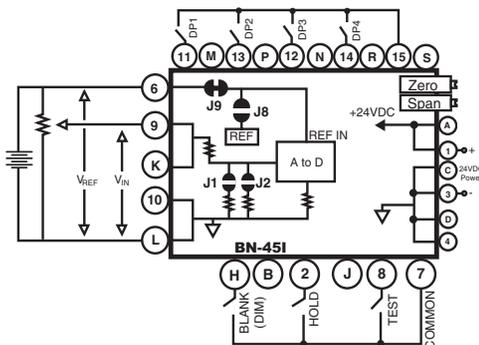

Compatibility

The BN-Series have a matching DIN case style that is complementary to the Lynx, Leopard and Tiger family of meters. BN-Meters are the OEM's choice for economical switchboard and process indication. For economy, each model is dedicated to a specific application and designed for quick and easy installation.



Specifications

Input Configuration:Single ended with provision to offset zero

Full Scale Ranges:±1.9999VDC (standard) ±19.999VDC
±199.99VDC

Input Impedance:Approx. 1MΩ

Input Protection:±250VAC/DC for all range

Conversion Rate:3 readings per second

Accuracy:± (0.05% of reading + 3 digits)

Temp. Coefficient:10ppm/°C in ratiometric mode 50ppm/°C in 2V ranges

Maximum Resolution:100μV in 2V range.

Zero Stability:.....Autozeroed. 0.1 counts per °C

Display:.....0.56" high red LEDs. Display Hold, Blank and Test provided.

Overrange Indication:All digits flash to indicate overrange

Power Supply:.....24VDC at 100mA (standard) internally isolated Optional 12V or 15V isolated supply

Operating Temperature: ..0°C to 60°C

Storage Temperature:.....-40°C to 85°C

Relative Humidity:95% (non condensing)

Case Dimensions:Bezel: 96X24 mm (3.62" X 0.95")
Depth behind bezel: 56.5 mm (2.23")
Plus 27 mm (1.06") for Push-On connector or plus 17.5 mm (0.68") for Edge connector

Weight:.....85 gms (3 oz)
125 gms (4.4 oz) when packed

BN-Series, For Those Applications Where Space Is A Premium

- BN-35**0.2/2/20/200V DC ranges, 3.5 digit, 5V DC Powered
- BN-35BCD**Parallel or Multiplex BCD, 3.5 digit, 5V DC Powered
- BN-35CL**4 to 20mA, Isolated 24V DC, 3.5 digit
- BN-35I**0.2/2/20/200V DC ranges, Isolated 24V DC, 3.5 digit

- BN-40BCD**Parallel or Multiplex BCD, 4.0 digit, 5V DC Powered
- BN-45**2/20/200V DC ranges, 4.5 digit, 5V DC Powered
- BN-45I**2/20/200V DC ranges, Isolated 24V DC, 4.5 digit