

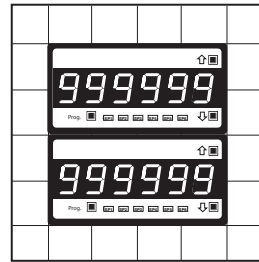


**1/8 DIN 96x48mm (3.78"x1.89") Case Dimensions and Panel Cutout**

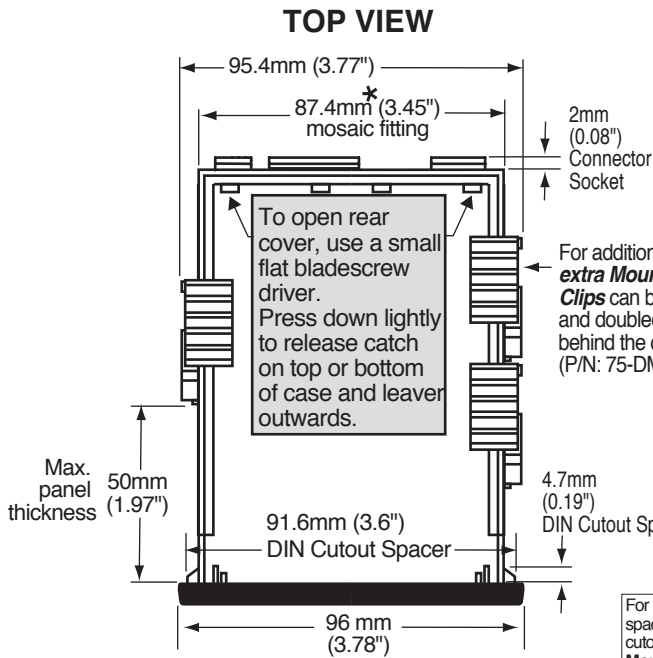

The 96x48mm case is particularly suitable for mounting in mosaic panels or insulative panels up to 2" thick. They can also stack mount, 2 up in existing cutouts for 1/4 DIN (96x96mm) or 4 up in 1/2 DIN (96x192mm).



**PANEL CUTOUT**

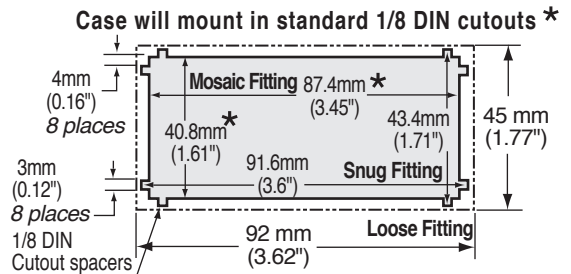

\*These dimensions are increased by 1.6mm (0.06") when the **metal surround case** is installed.



For extra strength in portable applications, the 8 DIN spacers should be snipped off and the **Mosaic fitting** cutout used. Alternatively, the **High Strength Panel Mounting Kit** (Part # OP-PMA96X48) can be used.

**FRONT VIEW**  
 1/8 DIN 96x48mm

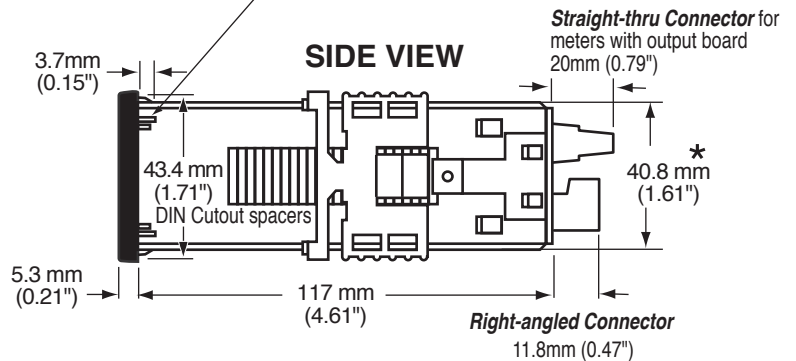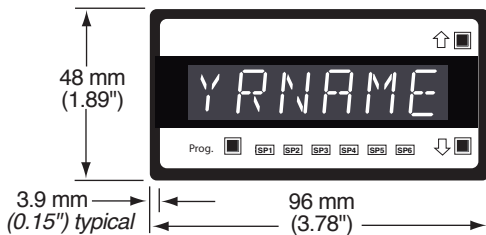

NOTE: The Metal Surround Case is pre-installed at the factory and cannot be removed without damage to the case.

**Metal Surround Case**  
 P/N:(OP-MTL96X48) uses Metal Screw Mount Clips and has a max. panel thickness mounting of 15.5 mm (0.61").




**Clear Lockable NEMA 4X Splash Proof Cover**  
 P/N:(OP-N4/96x48)

Removable Key-lock

Panel adaptor plates are available to retrofit most existing panel cutouts.



**High Strength Panel Mounting Kit**  
 P/N: OP-PMA96X48

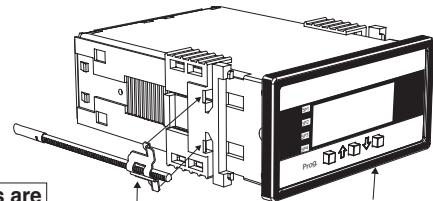

When extra panel mounting tightness is required, order the optional **screw mount clip**.  
 P/N:(OP-MTLCLIP)

Various bezel colors are available. Black is standard.